

GRILLES

DELTA SKY AIR

Beograd, Srbija

mob: 062 24 07 07

e-mail: jovan.milivojevic@delt-air.si

Supply grilles with adjustable blades 20 mm pitch.

**CHARACTERISTICS:**

Supply grilles with adjustable blades 20 mm pitch.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wall installation and for air delivery.

Installation height: 2,5 - 3,5 m.

FIXING:

- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Clamps upon request (KC).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

Supply grilles with adjustable blades 20 mm pitch.

**CHARACTERISTICS:**

Supply grilles with adjustable blades 20 mm pitch.

CONSTRUCTION:

Galvanized steel, or painted in RAL 9010, RAL 9016, RAL 7035. Models made of stainless steel AISI 304, 2B or BA finish, are available on demand.

UTILIZATION:

For wall installation and for air delivery.

Installation height: 2,5 - 3,5 m.

FIXING:


- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Lock upon request (KC).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

RH

Grilles with fixed blades with 0° or 15° deflection.

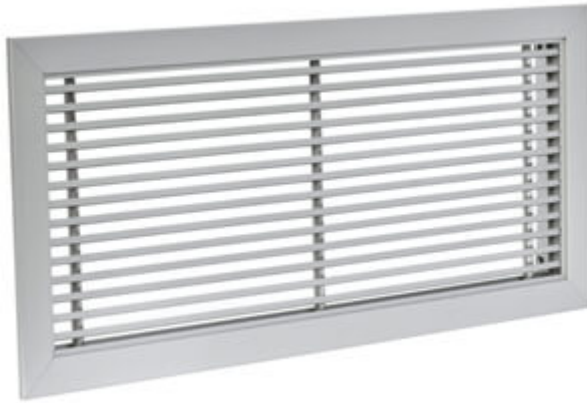

CHARACTERISTICS:

Grilles with fixed blades with 0° or 15° deflection.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wall and fan-coils installation, and for air intake and delivery.

Installation height: 2,5 - 3,1 m.

FIXING:


- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Lock upon request (KC).

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

RH-S

Grilles with fixed blades with 0° or 15° deflection.

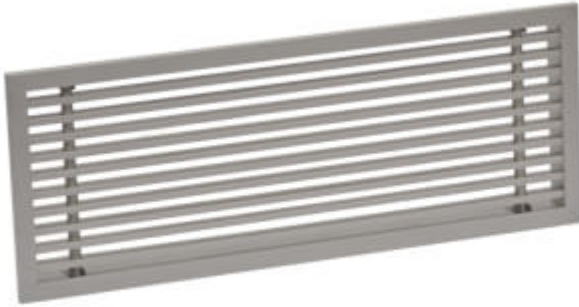

CHARACTERISTICS:

Grilles with fixed blades with 0° or 15° deflection. Frame 13 mm.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wall and fan-coils installation, and for air intake and delivery.

Installation height: 2,5 - 3,1 m.

FIXING:

- Clips
- Fixing by screws on the plenum.

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
-

Grilles for circular ducts 20 mm pitch.

**CHARACTERISTICS:**

Grilles for circular ducts 20 mm pitch.

CONSTRUCTION:

Galvanized steel, or painted in RAL 9010, RAL 9016, RAL 7035. Models made of stainless steel AISI 304, 2B or BA finish, are available on demand.

UTILIZATION:

For circular duct installation, and for air intake and delivery.

Installation height: 2,5 - 3,5 m.

FIXING:

- Fixing by frontal screws.

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
 - Getting damper.
 - Single blade deflecting damper.
-

RAZ-25

Return grilles with fixed and 45° inclined bars 25 mm pitch.



CHARACTERISTICS:

Return grilles with fixed and 45° inclined bars 25 mm pitch.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wall installation and for air intake.

FIXING:

- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Lock upon request (KC).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

RJZ-30

Return grilles with fixed and 45° inclined bars 30 mm pitch.



CHARACTERISTICS:

Return grilles with fixed and 45° inclined bars 30 mm pitch.

CONSTRUCTION:

Galvanized steel, or painted in RAL 9010, RAL 9016, RAL 7035. Models made of stainless steel AISI 304, 2B or BA finish, are available on demand.

UTILIZATION:

For wall installation and for air intake.

FIXING:

- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Lock upon request (KC).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

GRA-SMF

Return filter grille (bers inclined 45°). Removable core for filter insertion



CHARACTERISTICS:

Return filter grille (bers inclined 45°). Removable core for filter insertion and removal.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wale/ceiling installation and for air intake.

FIXING:


By clips (frontal screws on request).

DETAILS:

Closing: By magnets.

GMA

Square-grid grilles 13x13 mm pitch.

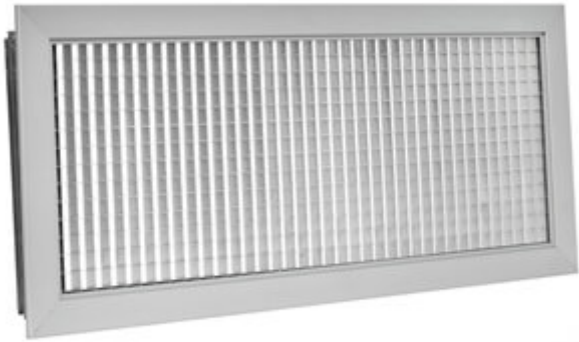

CHARACTERISTICS:

Egg crate grilles 13x13 mm pitch.

CONSTRUCTION:

Anodized aluminium. Square-grid inclined of 45° on model GMA-I.

UTILIZATION:

For wall installation and for air intake.

FIXING:

- Standard fixing by clips.
- Holes for screws upon request.
- Magnets on request (CL).
- Lock upon request (KC).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
-

RVR

Transit grilles, 20 mm pitch.



CHARACTERISTICS:

Transit grilles, 20 mm pitch.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For the air flow transit by doors and thin walls.

FIXING:

- Fixing by using frontal screws.

ACCESSORIES:

- Auxiliary frame.
-

SS-A/SS-E

Wall-mounted overpressure dampers 50 mm pitch.



CHARACTERISTICS:

Wall-mounted overpressure dampers 50 mm pitch.

CONSTRUCTION:

Anodized aluminium frame and blades.

UTILIZATION:

For wall installation and for air intake or delivery.

FIXING:


- Fixing by using clips or frontal screws on demand.

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
 - Bird screen.
-

GRP

Floor grilles composed of horizontal fixed bars with 12,5 mm of gap.

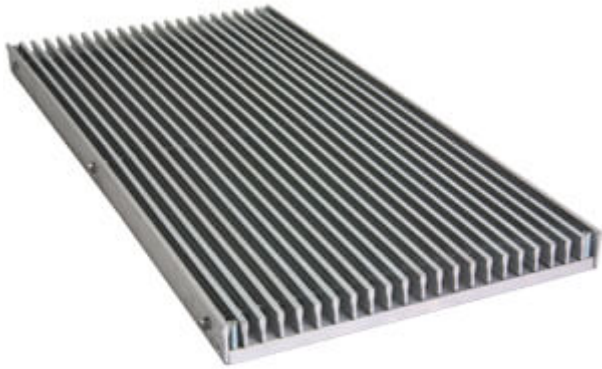

CHARACTERISTICS:

Floor grilles composed by horizontal fixed bars with 12,5 mm pitch.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For floor installation and for air intake or delivery.

FIXING:

- Fixing by using screws.

ACCESSORIES:

- Dust collection container.
 - Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet or extruded aluminium.
-

GRPZ

Floor grilles composed by horizontal fixed bars with 12,5 mm of gap.



CHARACTERISTICS:

Floor grilles composed by horizontal fixed bars with 12,5 mm pitch, with frame.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For floor installation and for air intake or delivery.

FIXING:

- Fixing by using screws.

ACCESSORIES:

- Dust collection container.
 - Calibration damper made of galvanized steel and fins with opposite movement.
-

GRPW

Floor slot diffuser.



CHARACTERISTICS:

Floor slot diffuser.

CONSTRUCTION:

Aluminium.

UTILIZATION:

For floor installation, in swimming pool and rooms with large glass surfaces or curtain walling, for air delivery. They are used to prevent condensation phenomena during heating season.

FIXING:

- Fixing by using screws.

ACCESSORIES:

- On demand.
-

FTD

Floor twist diffuser.



CHARACTERISTICS:

Floor twist diffuser.

CONSTRUCTION:

Die-cast and deburred aluminium. Dirt trap and adjustable swirl element are made of galvanized steel.

UTILIZATION:

For false floor installation and for air delivery.

FIXING:

By fixing plate and screws for false floors with thickness less than 50 mm.

GCAM

Round aluminium grilles. For flush-fitting. With mesh.



CHARACTERISTICS:

Round aluminium grilles. For flushfitting. With mesh.

GCAC

Round aluminium grilles. For flush-fitting. With mesh.



CHARACTERISTICS:

Round aluminium grilles. For flush-fitting. With mesh.

RAZ

Industrial return grilles with fixed and 45° inclined bars 60 mm pitch.



CHARACTERISTICS:

Industrial return grilles with fixed and 45° inclined bars 60 mm pitch.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wall installation and for external air intake or exhaust air flow.

FIXING:

Fixing by clips or frontal screws on request.

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
 - Bird screen.
 - Overpressure damper.
-

Industrial return grilles with fixed and 45° inclined bars 50 mm pitch.



CHARACTERISTICS:

Industrial return grilles with fixed and 45° inclined bars 50 mm pitch.

CONSTRUCTION:

Galvanized steel. Models made of copper, stainless steel AISI 304, 2B or BA finish, are available on demand.

UTILIZATION:

For wall installation and for external air intake or exhaust air flow.

FIXING:

Fixing by using frontal screws.

ACCESSORIES:

- Calibration damper made of galvanized steel and fins with opposite movement.
 - Mounting counterframes made of galvanized steel sheet.
 - Bird screen.
 - Overpressure damper.
-

